



**珍珠泉系列 PC-36B
PEARL SPRING SERIES**



DIMENSIONS 尺寸图:

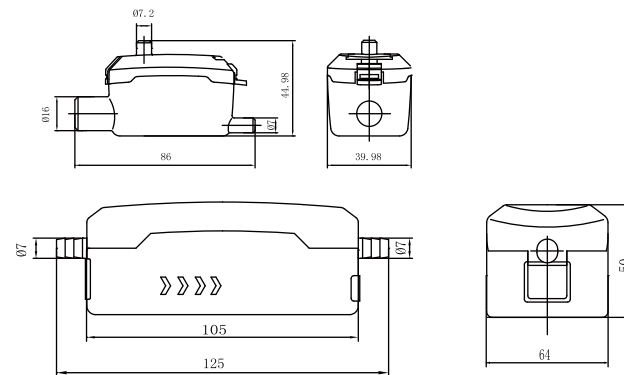

FLOW RATE:

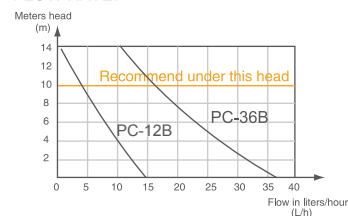

Model 型号	Performance(l/h@ Head)				
	0m	2m	4m	6m	8m
PC-12B	12	10	8	7	6
PC-36B	36	34	30	24	20

Model 型号	PC-12B	PC-36B
Voltage 电压	100-230V~/50-60Hz	100-230V~/50-60Hz
Suction lift 最大吸程	Max.2m(6.5ft)	Max.2m(6.5ft)
Discharge head 最大扬程	Max.10m(33ft)	Max.10m(33ft)
Rated 运行等级	Non continuous 非连续	Non continuous 非连续
Flow rate 最大流量	Max.12L/h(3.2GPH)	Max.36L/h(9.6GPH)
Tank capacity 储水箱容量	35ml	35ml
Mini splits up to 适用空调机功率	10KW(30,000btu/hr)	32KW(96,000btu/hr)
Sound level 噪音	<16dB(A)	<18dB(A)
Ambient temperature 使用环境温度	0℃~50℃	0℃~50℃
Power consumption 最大功率	3W	3W
Current intensity 最大电流	50mA	50mA
Safety switch 安全开关	NC 3A-250V	NC 3A-250V
N.W. 净重	Pump泵180g Reservoir水壶 70g	

Low noise	低噪音
High flow rate	高流量
Compact modern design	结构紧凑

Application应用范围:
Ceiling Concealed Split systems 天花板机
Ducted units 空调管扣内装